


4Mpx IR bullet camera HDCVI/ANALOG



Key features

- Sensor 1/3" 4Mpx PS CMOS
- 25fps@4Mpx/1080P/720P
- IR-cut filter with auto switch (ICR)
- Digital Noise Reduction 2D
- Functions AGC, AWB, BLC, HLC, D-WDR
- Varifocal lens 2.7-13.5mm F1.3
- Menu available through BCS recorder
- IR Led distance up to 60m
- Easy adjustment and installation
- Metal case protection IP66
- Power supply 12V DC(±25%)

Dimensions

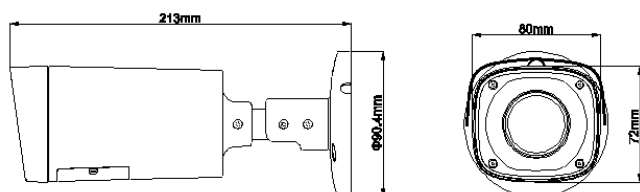

Specification

Model		BCS-THC5400IR-V-E
System	PAL	
Sensor	1/3" 4Mpx PS CMOS	
Pixels	2688(H) x 1520(V)	
Video out	1 V p-p, composite, BNC, 75 Ohm	
Standard Video	HDCVI/ANALOG	
Resolution	4Mpx(2560x1440) / 1080P(1920x1080) / 720P(1280x720)	
Minimum illumination	0.03Lux/F1.3, 30IRE, 0Lux IR On	
S/N ratio	> 65dB	
White balance	(AWB) Auto/Manual	
Basic functions	Lens	2.7-13.5 mm F1.3 Angle of View H: 98°~26°
	Backlight compensation	BLC / HLC / D-WDR
	Shutter	Auto/Manual (1/25-1/100000s)
	Gain control	(AGC) Auto/Manual
	Noise reduction	2D NR - regulation
	Day/night	IR-cut filter with auto switch (ICR)
	IR Led distance	Up to 60m
	Privacy masking	On / Off (8 areas, position and size regulation)
	Display rotation	Mirror horizontal/vertical
	Menu access	Through BCS recorder
Power supply	12VDC ±25%	
Power consumption	7.6 W (IR On)	
Working environment	-40°C ~ +60°C	
Weight	0,63kg	
Dimensions	213mm x 80mm x 72mm	