



### BCS-CRS-M2Z

RFID Reader

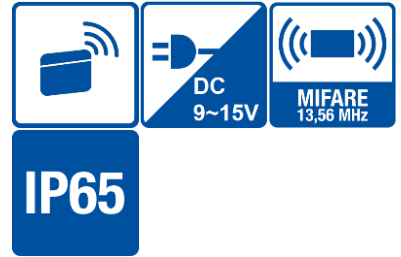

- RFID reader
- Outside casing IP65
- Standard Mifare 13.56MHz
- Interface Wiegand 34 bit / RS-485
- Function watchdog
- Indicator led with 3 colors
- Power supply 9~15V DC

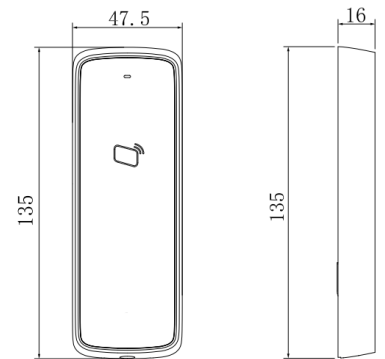

## BCS-CRS-M2Z

### RFID Reader

Processor	8 bit
Read format	13.56MHz
Read range	1~2cm
Response time	<0.1s
Interface	Wiegand 34bit / RS485
Functions	Tamper alarm, watchdog
Sound	buzzer
Power supply	DC 9-15V/100mA
Working environment	-30°C to +60°C RH ≤90%
Dimensions	47.5mm×135.0mm×16.0mm
Weight	0.18kg
Casing	Outside IP65

