

BCS-TQ3203IR3(-B)


2Mpx STARVIS IR bullet camera HDCVI/AHD/TVI/ANALOG with 2.8mm lens



Key features:

- Sensor 1/2.8" 2Mpx SONY STARVIS CMOS
- Resolution 1920×1080@30fps
- 4 system: HDCVI/AHD/TVI/ANALOG
- IR-cut filter with auto switch (ICR)
- Functions AGC, AWB, AES, BLC, HLC, Defog
- Digital Noise Reduction DNR
- Wide Dynamic Range WDR(100dB)
- Screen menu OSD
- Fixed lens 2.8mm
- IR 3 Led array distance up to 40m with life time up to 50 000 hours
- Protection IP66
- Working environment -30°C ~ +60°C
- Output selectable from switch
- Power supply 12V DC(±10%)
- **BCS-TQ3203IR3-B** – version in white

Dimensions:

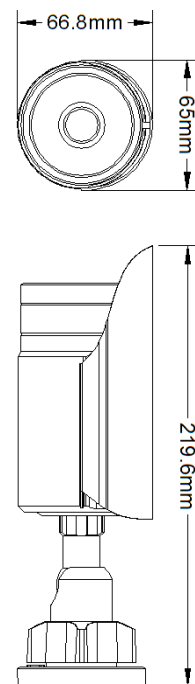

BCS-TQ3203IR3(-B)

2Mpx STARVIS IR bullet camera HDCVI/AHD/TVI/ANALOG with 2.8mm lens

Specification:

Scanning system	Progressive Scan
System	HDCVI/AHD/TVI/ANALOG
Sensor	IMX307+X600, 1/2.8" 2.16Mpx SONY STARVIS CMOS
Pixels	1920(H) × 1080(V)
Resolution	1080P(1920×1080) @30fps
Video out	Digital: HDCVI/AHD/TVI Analog: 1 V p-p, composite, BNC, 75 Ohm
Minimum illumination	Color: 0.1Lux B/W: 0Lux (IR On)
S/N ratio	> 50dB (AGC Off)
White balance	(AWB) Auto/manual
Lens	2.8mm F1.3
Backlight compensation	BLC / HLC / WDR(100dB)
Shutter	Auto/manual (1/30~1/30000s)
Gain control	(AGC) Auto/Manual
Noise Reduction	DNR Off/On - regulation
Defog	Off/On - regulation
Motion Detect	4 areas
Privacy masking	16 areas
Image rotate	Flip horizontal/vertical
Day/Night	IR-cut filter with auto switch (ICR)
IR	IR 3 Led array distance up to 40m
Power supply	12V DC (±10%)
Power consumption	<5W
Working environment	-30°C ~ +60°C, IP66
Weight	0.45kg
Dimensions	66.8mm(65mm) × 219.6mm